


Batz Phase 1 ARP ***REVISED 8/14/25***

The Hendricks County Surveyor's Office is looking to get quotes for phase 1 of the Batz ditch project which was approved through the Hendricks County Drainage Board as an ARP project.

1. Starting at the north side of cr E 1000 N dredge approx.. 2,216' of ditch from the west side heading north past the John Green outlet.
2. Work to be done from the west side of the ditch.
3. Spread spoils along the top of bank within the easement in the field area.
4. Contractor must come back to seed and straw grassy areas.

The cost of stone and all materials will need to be included in the quote. All pipe to be bedded in stone and installed according to the manufacturer specifications and in accordance with the Hendricks County Storm Water Handbook. I will be doing a walkthrough on 8/13/25 at 9:30 am. I Would like to have **SEALED QUOTES** returned to me by 4pm on 8/25/25 to be opened at Drainage Board. This project will have a 30-day completion date for phase 1 from the time the lowest bidder is notified weather depending. Please make note on your bid that this is an ARP funded project.

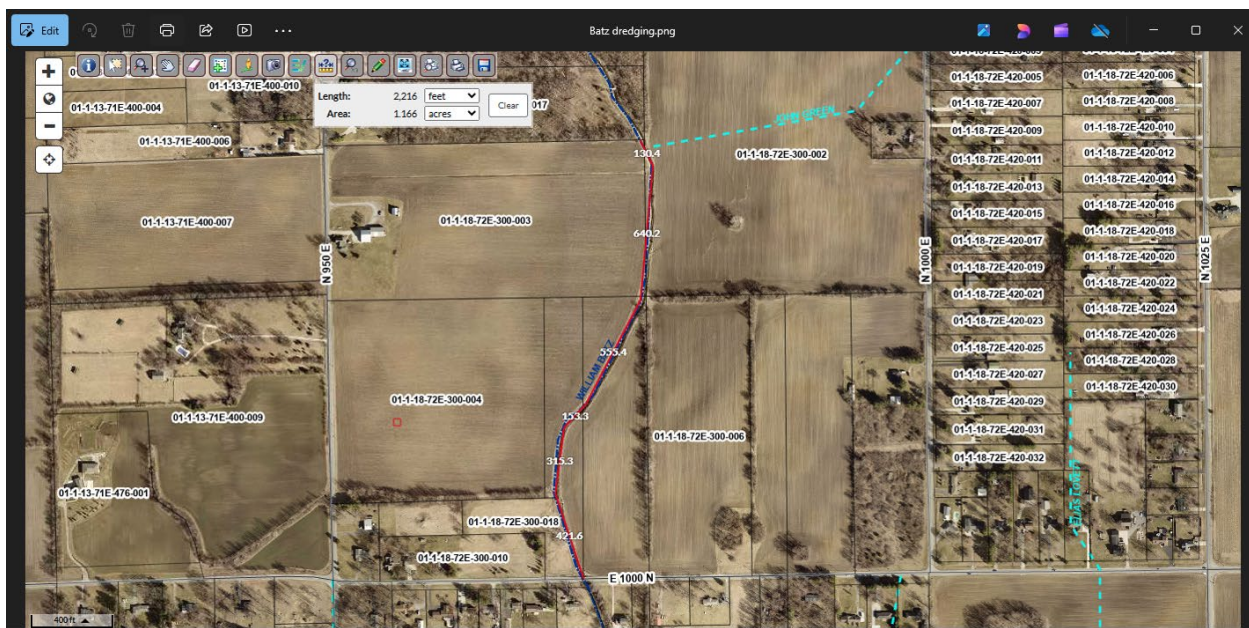

Batz Phase 1 ARP 8/8/25

The Hendricks County Surveyor's Office is looking to get quotes for phase 1 of the Batz ditch project which was approved through the Hendricks County Drainage Board as an ARP project.

1. Starting at the north side of cr E 1000 N dredge approx. 2,216' of ditch from the east side heading north past the John Green outlet.
2. Trees to be cut at ground level and chemical treated. Trees will be cleared within 20 feet of the top of the ditch bank on the east side of the ditch starting on the north side of county road 1000N, heading north to the north side of the John Green tile outlet. There are not many trees to be cleared (approximate 10-15) but the footages and detail needed added for this scope of work.
3. Spread spoils along the top of bank within the easement.
4. Contractor must come back to seed and straw.

The cost of stone and all materials will need to be included in the quote. All pipe to be bedded in stone and installed according to the manufacturer specifications and in accordance with the Hendricks County Storm Water Handbook. I will be doing a walkthrough on 8/13/25 at 9:30 am. I Would like to have SEALED QUOTES returned to me by 4pm on 8/25/25 to be opened at Drainage Board. This project will have a 30-day completion date for phase 1 from the time the lowest bidder is notified weather depending. Please make note on your bid that this is an ARP funded project.